
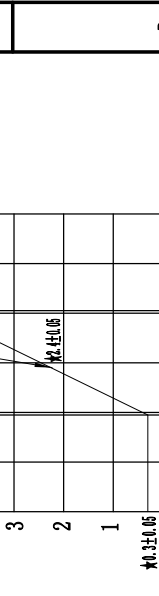
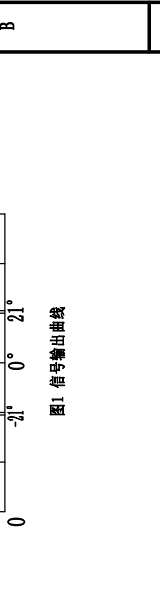



<p>1 尺寸以2D为准,未注尺寸参考3D图纸。 有害物质管控标准 N/A/HB/2H/3H/4H/5H/6H/7H/8H/9H/10H YP/PZ-02-10-005</p>	<p>2</p> 	<p>3</p> 	<p>4</p> 	<p>5</p>  <p>图1 信号输出曲线</p>	<p>6</p>																																																
<p>1</p>	<p>2</p>	<p>3</p>	<p>4</p>	<p>5</p>	<p>6</p>																																																
<h3 style="text-align: center;">技术要求</h3>																																																					
<p>1、供应商：重庆渝欣平瑞电子股份有限公司； 2、型号：零回角度传感器TJ563A-1； 3、产品装配完成后，转轴应能灵活转动无卡滞； 4、产品技术要求如下： 1)、工作电压：DC5V±2%(YPK1004A 5V电源) <math>\triangle</math> 2)、工作电流：≤10mA； 3)、线性度：≤1.5%； 4)、工作温度：-40℃~+85℃； 5)、储存温度：-50℃~+105℃； 6)、测试温度：23℃±5℃； 7)、工作环境湿度：≤95%； 8)、防护级别：IP67（电子侧）； 9)、起始电压：0.3±0.05V，中间电压：2.4±0.05V，终止电压：4.5±0.1V；<math>\triangle</math> 10)、产品应满足-40℃~+105℃，高低温各30min为一个周期，共3个周期的高低温冲击试验； 11)、产品应满足图1旋转角度，频率15~20次/min，共计50000次的耐久试验。</p>																																																					
<p>5、产品标识内容及位置：TJ563A-1 <math>\triangle</math> 批号</p>																																																					
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 10%;">7</td> <td style="width: 15%;">1201200030/120020003</td> <td style="width: 15%;">聚氨酯密封胶</td> <td style="width: 10%;">1</td> <td style="width: 15%;">FM-700 (YXP) A/B</td> <td style="width: 15%;">A=2.1g, B=10.5g</td> </tr> <tr> <td>6</td> <td>1100300018</td> <td>自攻螺钉(白锌)</td> <td>1</td> <td>ST2.2×6.5 (GB845-85)</td> <td></td> </tr> <tr> <td>5</td> <td>1131000181</td> <td>端盖</td> <td>1</td> <td>TJ563.14</td> <td></td> </tr> <tr> <td>4</td> <td>6810491046</td> <td>转轴组件</td> <td>1</td> <td>TJ563.90</td> <td></td> </tr> <tr> <td>3</td> <td>1131000184</td> <td>壳体</td> <td>1</td> <td>TJ563.11</td> <td></td> </tr> <tr> <td>2</td> <td>6040300161</td> <td>印制板组件</td> <td>1</td> <td>TJ563A.241</td> <td></td> </tr> <tr> <td>1</td> <td>1131000183</td> <td>盖板</td> <td>1</td> <td>TJ563.13</td> <td></td> </tr> <tr> <td>序号</td> <td>编码</td> <td>名称</td> <td>数量</td> <td>规格</td> <td>备注</td> </tr> </table>						7	1201200030/120020003	聚氨酯密封胶	1	FM-700 (YXP) A/B	A=2.1g, B=10.5g	6	1100300018	自攻螺钉(白锌)	1	ST2.2×6.5 (GB845-85)		5	1131000181	端盖	1	TJ563.14		4	6810491046	转轴组件	1	TJ563.90		3	1131000184	壳体	1	TJ563.11		2	6040300161	印制板组件	1	TJ563A.241		1	1131000183	盖板	1	TJ563.13		序号	编码	名称	数量	规格	备注
7	1201200030/120020003	聚氨酯密封胶	1	FM-700 (YXP) A/B	A=2.1g, B=10.5g																																																
6	1100300018	自攻螺钉(白锌)	1	ST2.2×6.5 (GB845-85)																																																	
5	1131000181	端盖	1	TJ563.14																																																	
4	6810491046	转轴组件	1	TJ563.90																																																	
3	1131000184	壳体	1	TJ563.11																																																	
2	6040300161	印制板组件	1	TJ563A.241																																																	
1	1131000183	盖板	1	TJ563.13																																																	
序号	编码	名称	数量	规格	备注																																																